
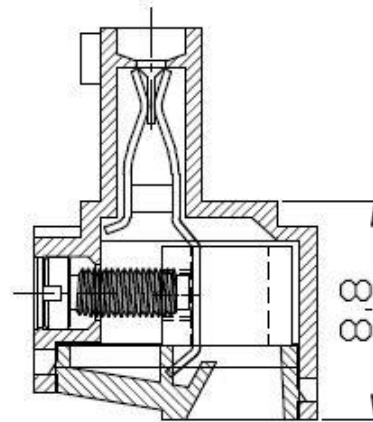
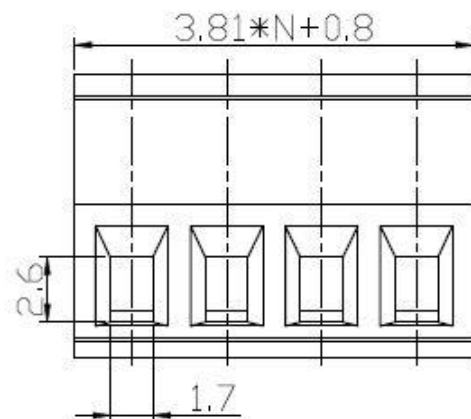
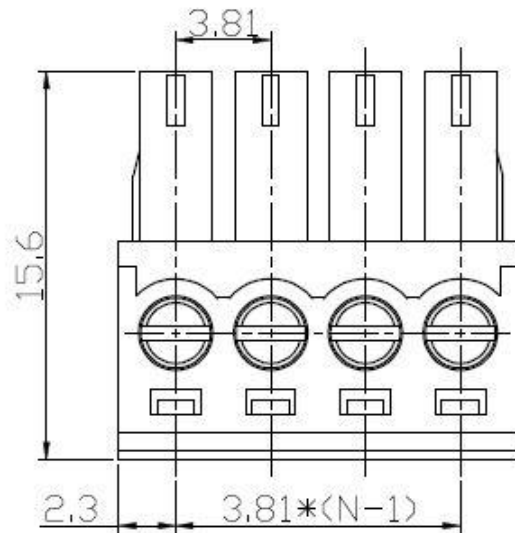


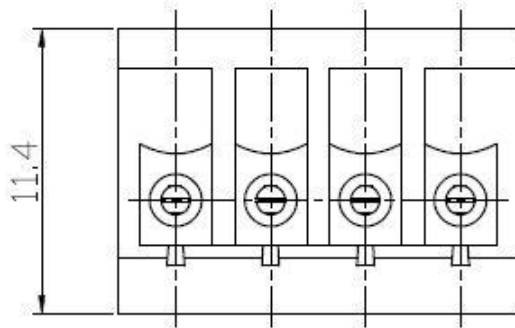

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

Material

Contact: Phosphor bronze

Screw: M2 Steel Zinc Plated

Housing: PA66, UL94V-0

Electrical

Rated Voltage: 125V

Rated Current: 8A

Contact Resistance: 20mOhm

Insulation Resistance:

5000MOhm/1000V

Withstanding Voltage: AC 1500V/1Min

Wire range: 24-14AWG

Mechanical


Temp. Range: -40C - +105C

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PLUGGABLE TERMINAL BLOCKS PITCH 3.81MM	
X.	±0.20	X.	±2°	UNITS	mm			
.X	±0.15	.X	±1°	 باتو الکترونیک				
.XX	±0.10	.XX	±0.5°					
DRAWING TYPE								
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.								





REV	CONTENT	CHK	DATE
V0.0	CONTENT	zx	2020.06.19

NOTES:

- 1.Rating:300V 8A ,
- 2.Insulation Withstands Voltage: AC2000V/MIN
- 3.Insulation Resistance: 500MΩ or more at DC500V
- 4.Using Temperature Range: -40°C--+105°C
- 5." ★ " is the important dimension

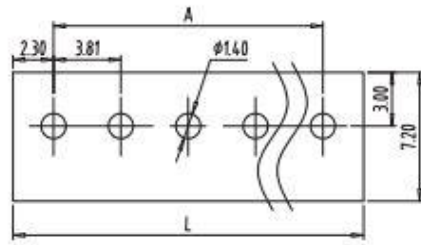

PCB LAYOUT
S=3:1

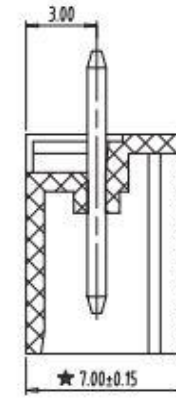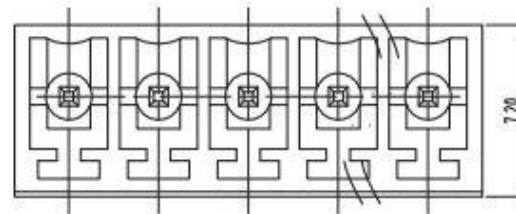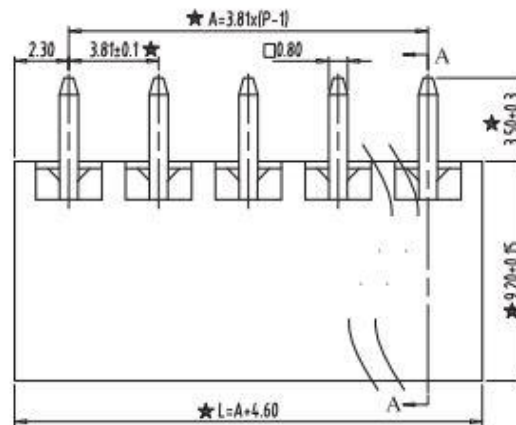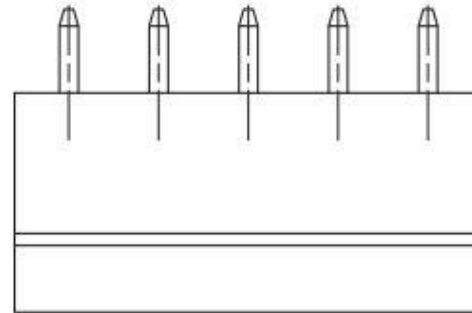

SECTION:A-A

Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$		$-$		$//$	
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 to all	over 0 to 100	over 100 to 150	over 150 to 200			
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	باتو الکترونیک 				
CHK.					
APP.					
KEEN S					