


△ SPECIFICATION


Current Rating: 3A AC/DC
 Voltage Rating: 250V AC Max.
 Operation Temperature: -25°C~+85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 Contact: Brass, Tin Plated
 Insulator: PA66(UL94V-0), White
 RoHS Compliant




△




Recommended P.C.B. Layout

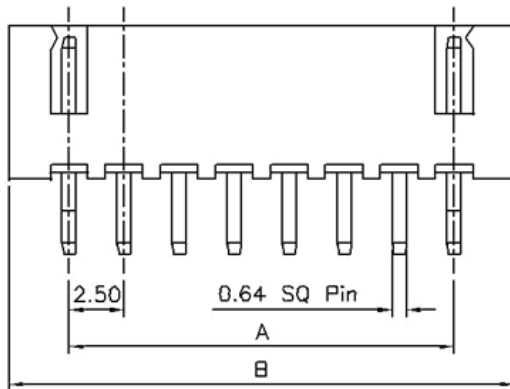


△ 3~12 Pin



△




△



△ 2 Pin

Pin	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50

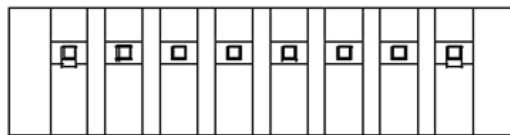

△



باتو الکترونیک

BATOETC.COM

DRAWING No.

APPROVED BY

EMILY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

CHECKED BY

HZF

.X ±0.35

DRAWING BY

WZL

.XX ±0.25

SCALE

NONE

REV.

A1

UNIT

mm



△ A1

Modify Data

HZF

02/23/2011

△ A0

NEW RELEASE

HZF

08/24/2009

NO. REV.

REVISIONS

CHK

DATE