
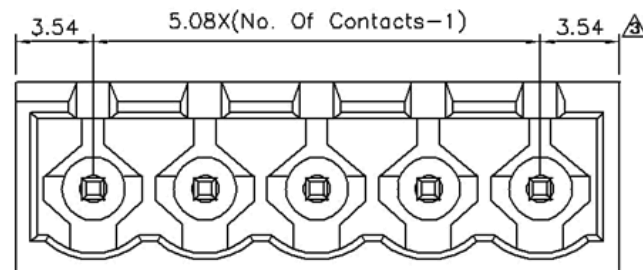
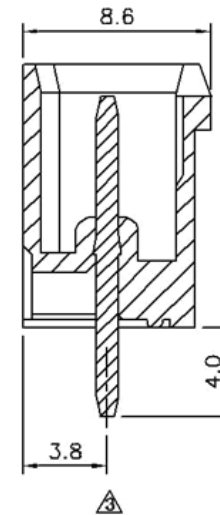


Recommended P.C.B. Layout

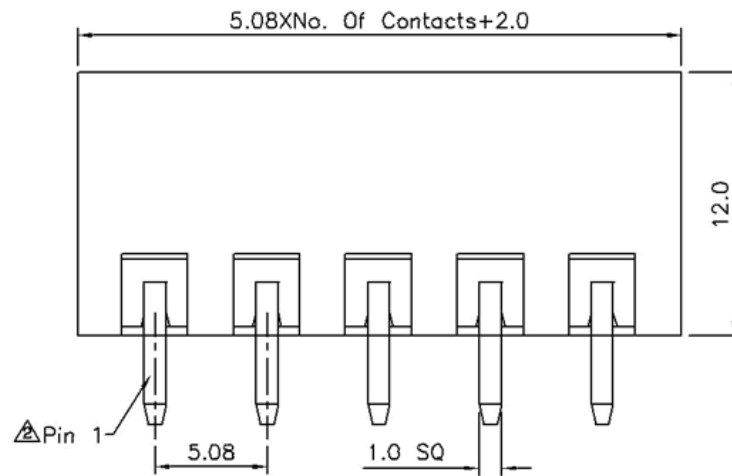

SPECIFICATION

Current Rating:16A

Voltage Rating:300V AC

Withstanding Voltage:2500V AC(1Minute)

Using Temperature Range:-40°C~+105°C

Soldering Temperature:+250°C,5s Max.

Solder Pin:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green

RoHS Compliant

باتو الکترونیک

DRAWING No.

09134

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A3

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT

mm

NO.

REV.

REVISIONS

A3

Modify Date

HZF

01/25/2013

A2

Add Pin 1

HZF

11/22/2011

A1

Modify Date

HZF

08/04/2011

A0

NEW RELEASE

HZF

04/13/2009




NO.

REV.

REVISIONS

CHK

DATE

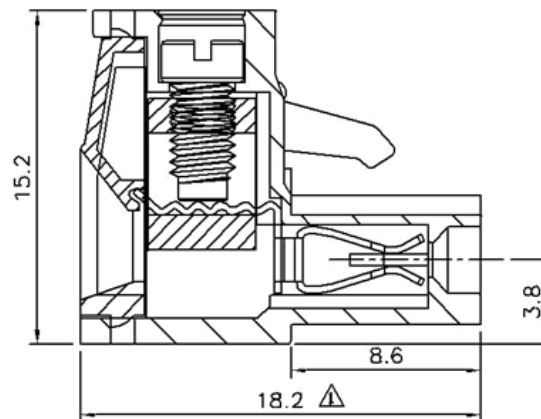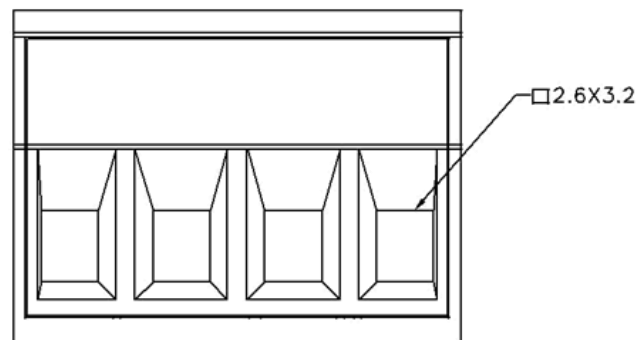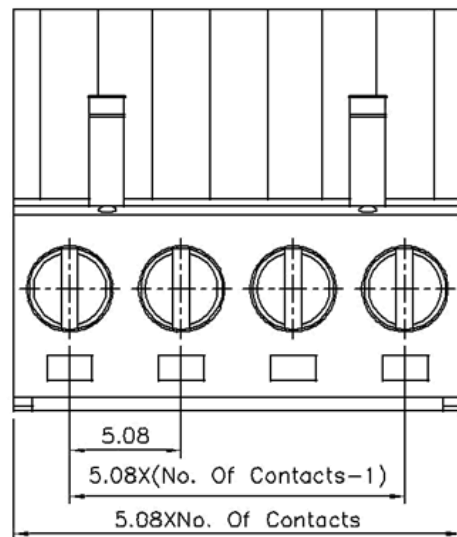

△△ SPECIFICATION

Current Rating:16 Amp/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute)
 Test Time=60 Sec./1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C/
 5 Seconds Max.
 Wire Range:12~26 AWG
 Torque:5.0 Kgf.cm/M3
 Insulator Body(Housing):Polyamide(UL94V-0),Green
 △ Contact(Metal Housing):Copper Alloy,Nickel Plated
 Wire Guard:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 RoHS Compliant

باتو الکترونیک

DRAWING No.

19868

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT

mm



NO.

REV.

NO.

REV.

A3

A2

A1

A0

Modify Spec.

Modify Data

Modify Data

NEW RELEASE

REVISIONS

HZF

HZF

HZF

HZF

CHK

02/12/2014

12/16/2011

06/29/2010

04/10/2009

DATE