

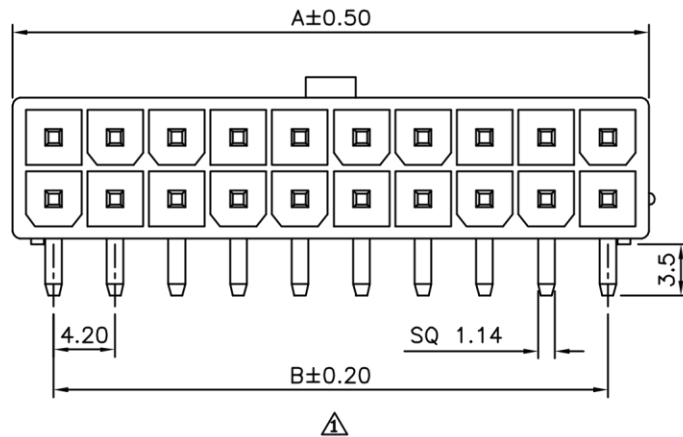


Recommended P.C.B. Layout(Top View) ⚠

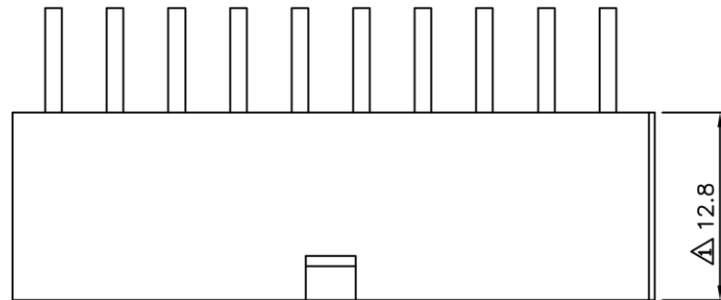

باتو الکترونیک

- ⚠ SPECIFICATION
 Current Rating: 7.0 Amp Max.
 Dielectric Withstand Voltage:
 1000V AC RMS For 60 Seconds
 Insulation Resistance: 1000 Megaohms Min.
 At 1000V DC
 Operation Temperature: -25°C ~ +85°C
 Housing: PA66(UL94V-2)
 ⚠ Terminal: Brass, Tin Plated Over Nickel
 RoHS Compliant

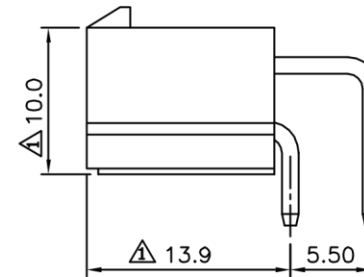

Pin	A	B
02	5.60	—
04	9.80	4.20
06	14.00	8.40
08	18.20	12.60
10	22.40	16.80
12	26.60	21.00
14	30.80	25.20
16	35.00	29.40
18	39.20	33.60
20	43.40	37.80
22	47.60	42.00
24	51.80	46.20

باتو الکترونیک

DRAWING No.

02283

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

⚠ .X ±0.30
 .XX ±0.20
 .XXX ±0.10

SCALE

NONE

REV.

A2

UNIT
mm

⚠ A2

Modify Data

HZF

07/10/2012

⚠ A1

Modify Data

HZF

02/22/2010

⚠ A0

NEW RELEASE

HZF

NO. REV.

REVISIONS

CHK

DATE