
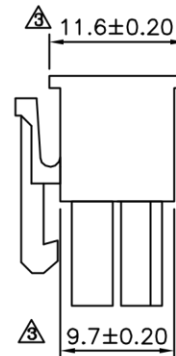
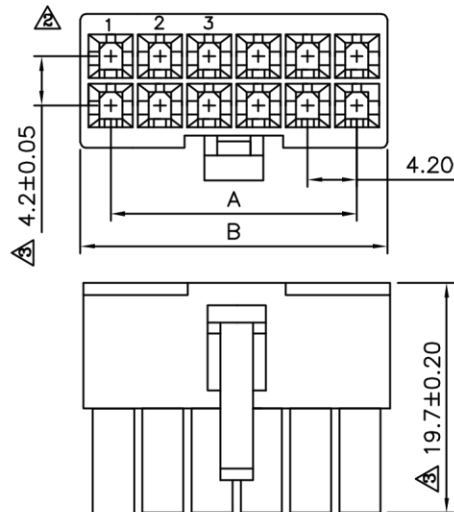
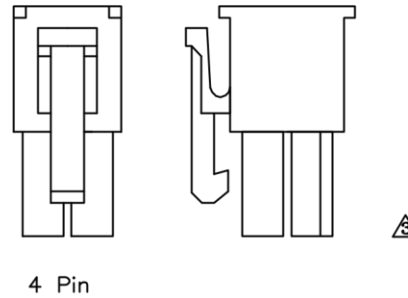
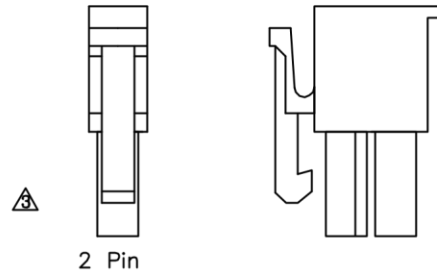



SPECIFICATION

- ⚠ Current Rating:7A AC/DC
Voltage Rating:250V AC/DC
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute
Temperature Range:-25°C~+120°C
Insulator:PA66(UL94V-2),Nature
RoHS Compliant



Circuits	A	B	Tolerance
2		5.5	A±0.20 B±0.30
4	4.20	9.7	
6	8.40	13.9	
8	12.60	18.1	A±0.30 B±0.40
10	16.80	22.3	
12	21.00	26.5	
14	25.20	30.7	
16	29.40	34.9	A±0.40 B±0.50
18	33.60	39.1	
20	37.80	43.3	
22	42.00	47.5	
24	46.20	51.7	

باتو الکترونیک

DRAWING No.

02225

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

REV.

A4


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.5

.X ±0.25

.XX ±0.2

.XXX ±0.08

UNIT
mm

⚠ A4	Modify Data	HZF	01/12/2010
⚠ A3	Modify Data	HZF	11/14/2009
⚠ A2	Modify Data	HZF	10/20/2009
⚠ A1	Add Spec.	BECKY	2004/11/18
⚠ A0	NEW RELEASE		
NO. REV.	REVISIONS	CHK	DATE