
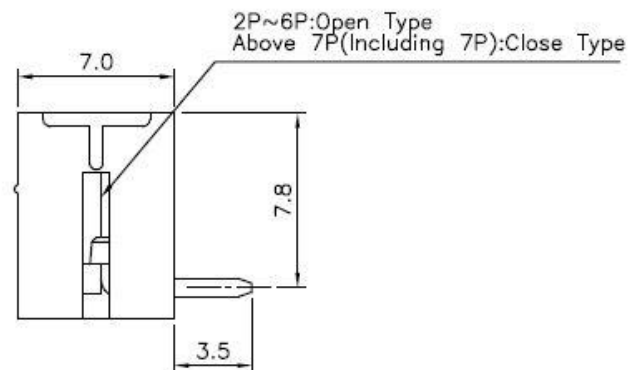
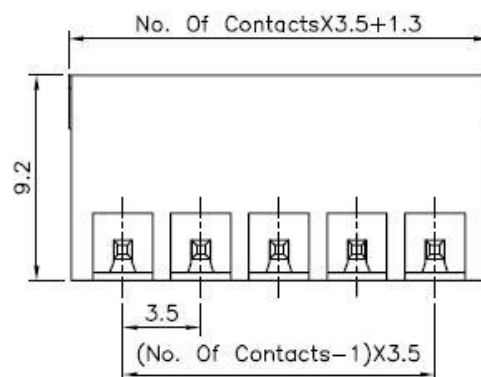


Recommended P.C.B. Layout

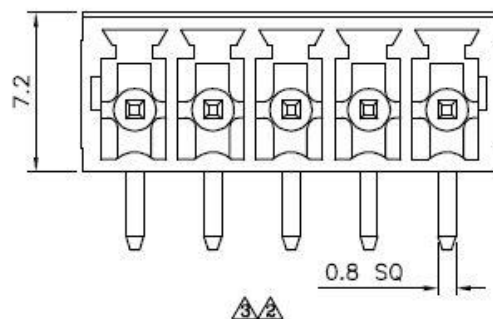

SPECIFICATION

Current Rating:12 Amp/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec/1 PCS

Operation Temperature:-40°C~+105°C

Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

باتو الکترونیک

DRAWING No.

19835

SCALE

NONE

APPROVED BY


CHECKED BY

DRAWING BY


EMILY

HZF

HAO

UNLESS OTHERWISE
SPECIFIEDTOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X* ±1*UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A4		Modify Data	HZF	09/04/2015
A3		Modify Data	HZF	05/31/2012
A2		Modify Data	HZF	11/23/2011
A1		Modify Data	HZF	07/30/2010
A0		NEW RELEASE	HZF	04/07/2009

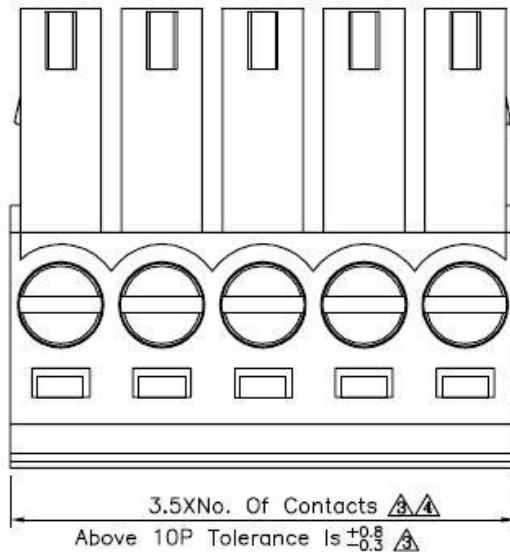**△ SPECIFICATION**

Voltage Rating:300V AC
Current Rating:12 Amps/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute) Test
Time=60 Sec/1 PCS
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Soldering Reliability:
Test Temperature=250°C±10°C/5 Seconds Max.

△ Contact(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated

△ Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

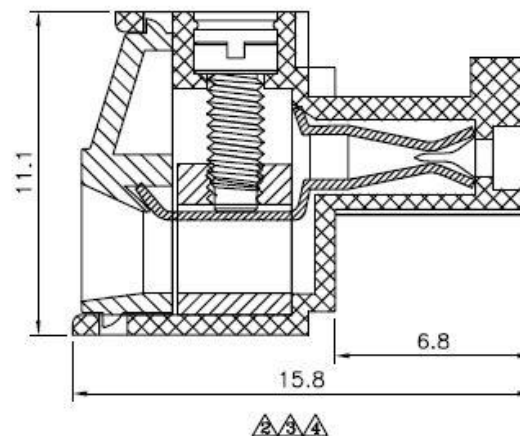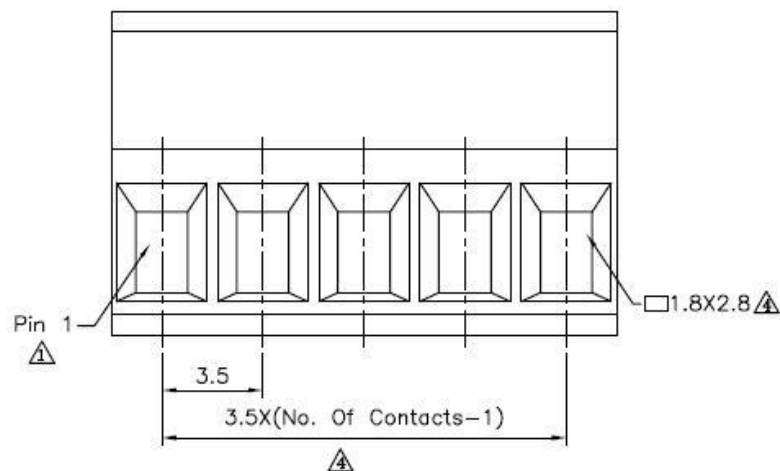

باتو الکترونیک

DRAWING No.

19840

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm

Δ A4	Modify Data	HZF	10/24/2014
Δ A3	Modify Data	HZF	08/28/2012
Δ A2	Modify Data	HZF	05/17/2012
Δ A1	Modify Data	HZF	11/22/2011
Δ A0	NEW RELEASE	HZF	04/09/2009
NO. REV.	REVISIONS	CHK	DATE