
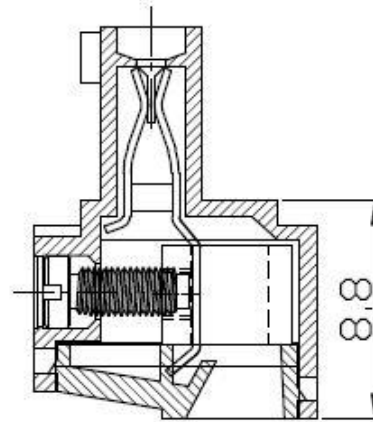
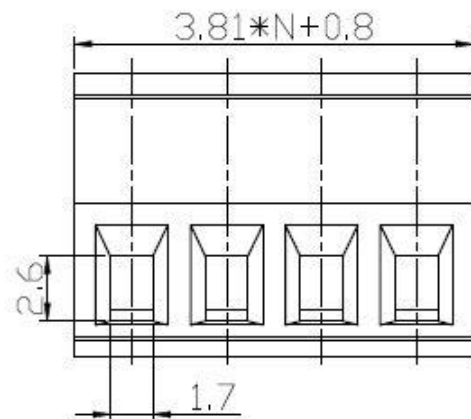
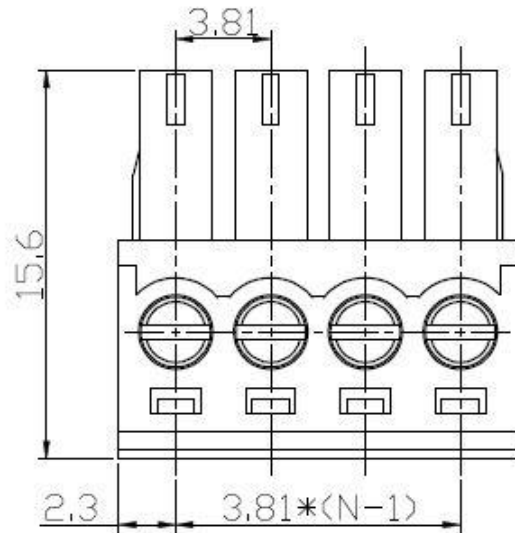


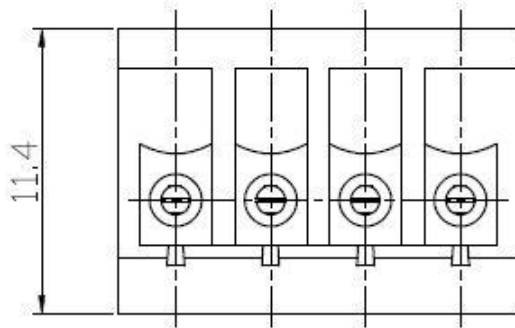

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

Material

Contact: Phosphor bronze

Screw: M2 Steel Zinc Plated

Housing: PA66, UL94V-0

Electrical

Rated Voltage: 125V

Rated Current: 8A

Contact Resistance: 20mOhm

Insulation Resistance:

5000MOhm/1000V

Withstanding Voltage: AC 1500V/1Min

Wire range: 24-14AWG




Mechanical

Temp. Range: -40C - +105C


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PLUGGABLE TERMINAL BLOCKS PITCH 3.81MM	
X.	±0.20	X.	±2°	UNITS	mm			
.X	±0.15	.X	±1°	 باتو الکترونیک				
.XX	±0.10	.XX	±0.5°					
DRAWING TYPE								
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.								

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014-11-29


Model : KH-15EDGRC-3.81-3PG

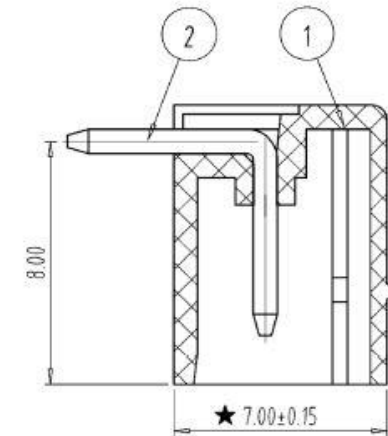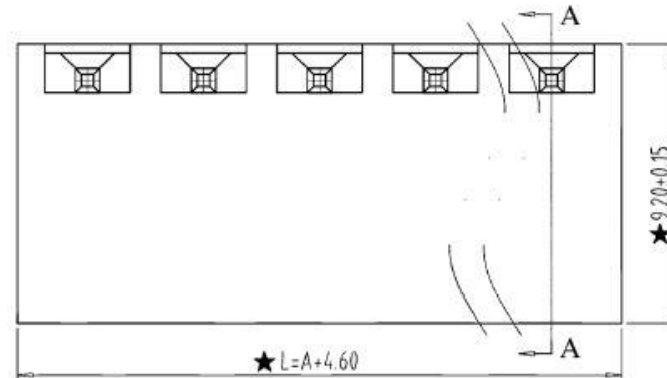

SECTION:A-A

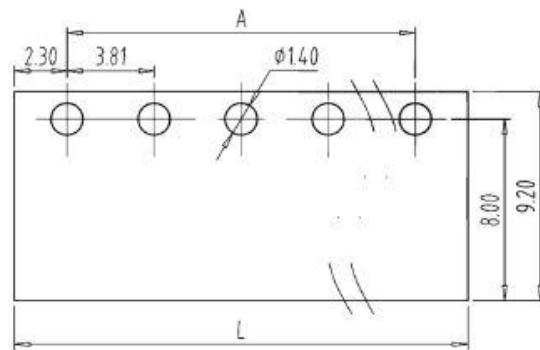

PCB LAYOUT
S=3:1

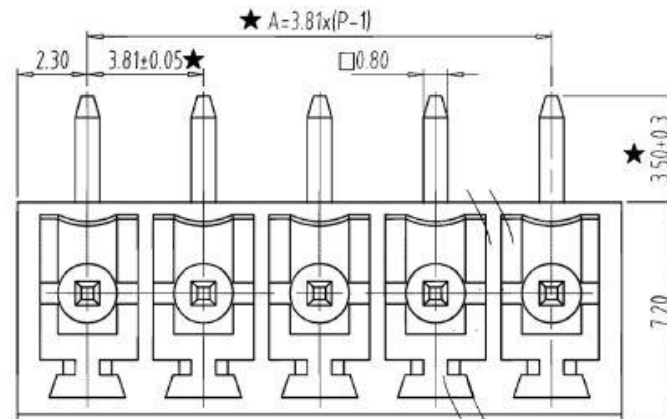

NOTES:

- 1.Rating:300V 8A ,
- 2.Insulation Withstands Voltage: AC2000V/MIN
- 3.Insulation Resistance: 500MΩ or more at DC500V
- 4.Using Temperature Range: -40°C---+105°C
- 5." ★ " is the important dimension

2	PIN	ZF100B0001	P	BRASS	Sn Plated
1	HOUSING	ZF200A0XXXX	1	PA66(V0)	

باتو الکترونیک

KH-15EDGRC-3.81-3PG

0755-83044319

A	Total Pitch Tolerances									Nominal dimension range									$\perp$		$\div$	$\parallel$		
	in mm									in mm														
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	