

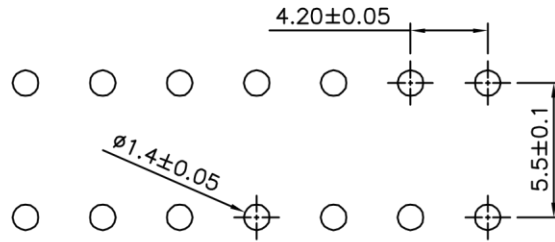
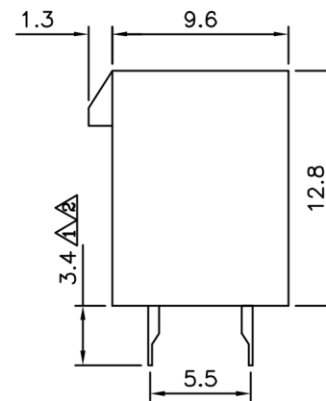


△ SPECIFICATION

Current Rating: 7A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 1500V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
Temperature Range: -25°C ~ +85°C
Insulator: PA66 (UL94V-2)
△ Contact: Brass, Tin Plated Over Nickel
RoHS Compliant

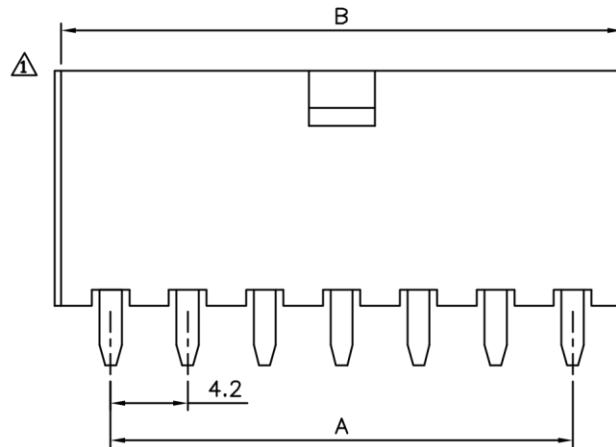

Recommended P.C.B. Layout
PCB Thickness: 1.6mm

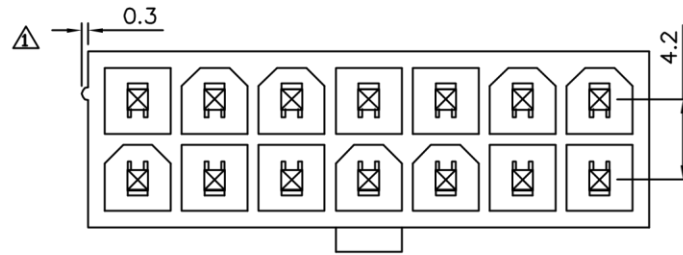

△

Pin	A	B
02	—	5.2
04	4.20	9.4
06	8.40	13.6
08	12.60	17.8
10	16.80	22.0
12	21.00	26.2
14	25.20	30.4
16	29.40	34.6
18	33.60	38.8
20	37.80	43.0
22	42.00	47.2
24	46.20	51.4

باتو الکترونیک

DRAWING No.

02256

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

SCALE

NONE

REV.

A2

UNIT
mm

NO. REV.

REVISIONS

CHK

DATE

A2

Modify Data

HZF

08/02/2013

A1

Modify Data

HZF

10/20/2009

A0

NEW RELEASE