


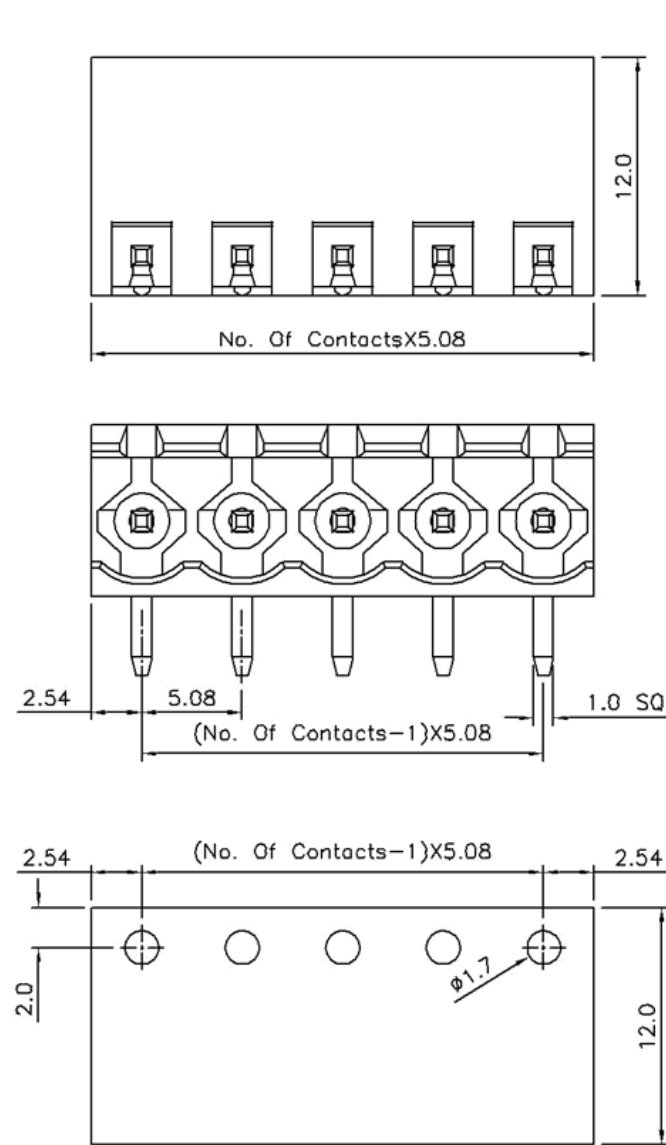

Recommended P.C.B. Layout

△ SPECIFICATION

Voltage Rating: 300V AC

Current Rating: 16A

Withstanding Voltage: AC 2500V (1 Minute)

Using Temperature Range: -40°C ~ +105°C

Soldering Temperature: +250°C, 5 Seconds Max.

Solder Pin: Copper Alloy, Tin Plated

△ Insulator Body (Housing): Polyamide + G.F. (UL94V-0), Green
RoHS Compliant

باتو الکترونیک

DRAWING No.

19883

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HTP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm

A2

Modify Data

HZF

08/08/2014

A1

Modify Data

HZF

02/17/2012

A0

NEW RELEASE

HZF

04/10/2009

NO. REV.


REVISIONS

CHK


DATE

△△ SPECIFICATION


Current Rating:16 Amp/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute)
 Test Time=60 Sec./1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C/
 5 Seconds Max.
 Wire Range:12~26 AWG
 Torque:5.0 Kgf.cm/M3
 Insulator Body(Housing):Polyamide(UL94V-0),Green
 △ Contact(Metal Housing):Copper Alloy,Nickel Plated
 Wire Guard:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 RoHS Compliant

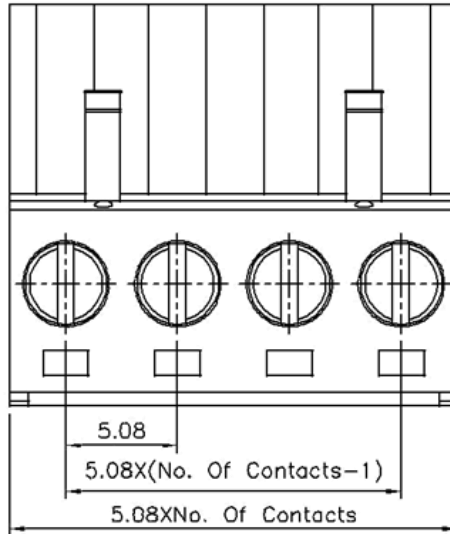

△

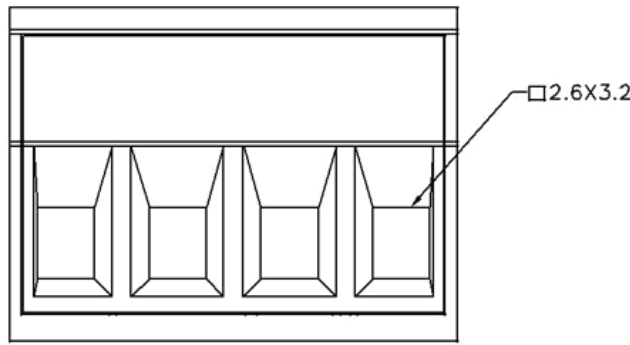

△

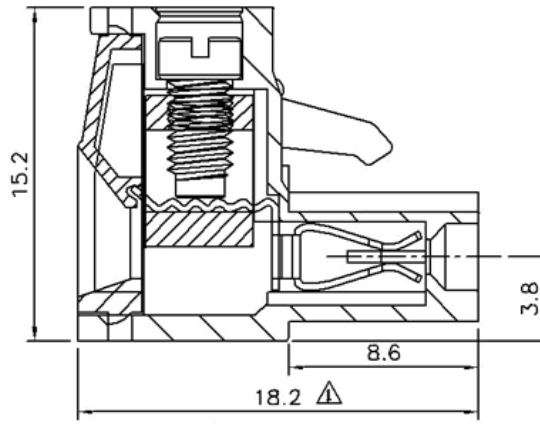

△

باتو الکترونیک

DRAWING No.

19868

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.50


.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Spec.	HZF	02/12/2014
△	A2	Modify Data	HZF	12/16/2011
△	A1	Modify Data	HZF	06/29/2010
△	A0	NEW RELEASE	HZF	04/10/2009